




Sprężarka śrubowa **MAYEKAWA**

Seria I

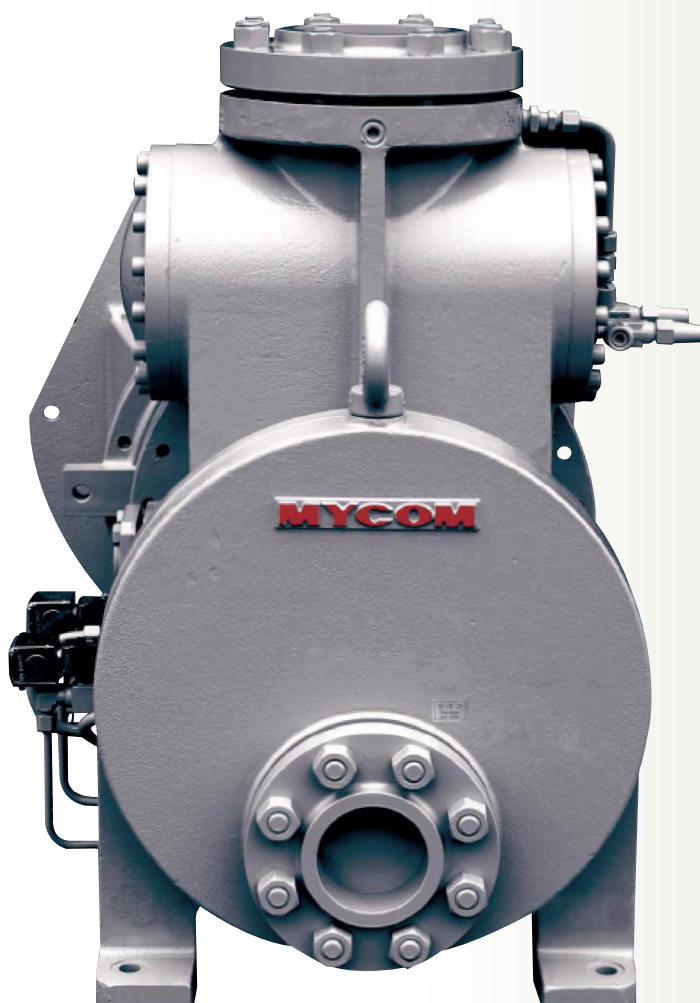

FEATURES



1. Łatwe dopasowanie

Kołnierzowa konstrukcja sprężarki/silnika pozwala na łatwe dopasowanie.

2. Built-in suction strainer and check valve

The built-in suction strainer and check valve allow for easy maintenance

3. Smarowanie olejowe

Smarowanie olejowe odbywa się na zasadzie ciśnienia różnicowego.

4. Łożyska

Łożyska wałeczkowe są wbudowane w sprężarkę.

5. Capacity regulation

The capacity is regulated by solenoid valves in 2-steps (100%,50%) on the i125 models

The capacity is regulated by solenoid valves in 3-steps (100%, 75%, 50%) on the i160 models

Further regulation is possible by frequency inverted operation with a speed range of 1500 - 4500 rpm on the i125S and I160S models The i125M, i125L, i160M and i 160L models can operate in the speed range 1500 - 3600 rpm


6. Simple structure makes packaging easy

This compressor makes smart packaging using its simple piping design

7. High efficiency, low vibration and low noise

The use of Mayekawa's traditional screw rotor profile ensures a high efficiency, low vibration and a low noise level

DIMENSIONS

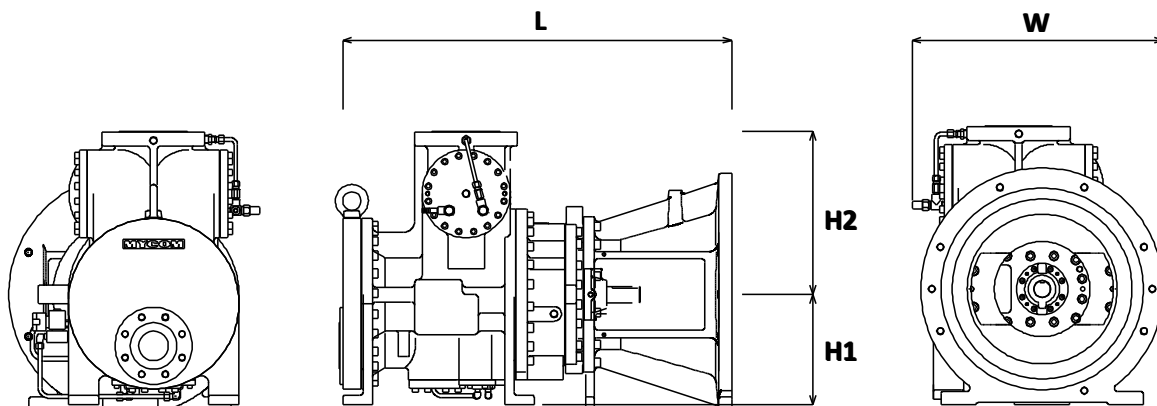

Model	Dimensions (mm)				
	L	W	H1	H2	H2 without eyebolt
i125S	906,5	550	280	519	448
i125L	976,5	550	280	519	448
i160S	969,5	684	300	445	N/A
i160M	1014,5	684	300	445	N/A
i160L	1059,5	684	300	445	N/A

CAPACITIES

Model	i125S		i1125L	
	Evaporating Temperature (°C)	Cooling Capacity (kW)	Absorbed Power (kW)	Cooling Capacity (kW)
0	184,2	36,7	274,8	53,4
-5	151,5	36,0	226,1	52,4
-10	135,1 *	37,0	201,6 *	53,9
-15	110,7 *	35,4	164,9 *	53,4
-20	90,0 *	34,0	133,0 *	52,9
-25	72,2 *	31,7	107,7 *	46,3

Remarks:

Refrigerant: NH₃, Speed: 2950 rpm, Tc = +35°C, Sh = 0K, Sc = 0K

* With DX-economizer

Model	i160S		i160M		i160L	
	Evaporating Temperature (°C)	Cooling Capacity (kW)	Absorbed Power (kW)	Cooling Capacity (kW)	Absorbed Power (kW)	Cooling Capacity (kW)
0	398	77	498	92	597	110
-5	327	75	410	91	491	108
-10	292 *	77	366 *	93	438 *	11
-15	240 *	74	300 *	89	359 *	106
-20	195 *	71	244 *	86	292 *	102
-25	157 *	67	196 *	81	235 *	96

Remarks:

Refrigerant: NH₃, Speed: 2950 rpm, Tc = +35°C, Sh = 0K, Sc = 0K

* With DX-economizer

SPECIFICATIONS

Items		model				
		i125S	i125L	i160S	i160M	i160L
Compressor weight *	kg	530	570	640	680	720
Flange type	IEC	FF400, FF500		FF600		
Speed (rpm)	min ¹	1500 - 4500	1500 - 3600	1500 - 4500	1500 - 3600	
Rotation direction	-	Clockwise looking onto the compressor drive shaft				
Displacement 50Hz/60Hz	m ³ /hr	197/237	296/356	415/499	519/624	622/749
Refrigerant		R717				
Design pressure	barG	26				
Capacity regulation	-	2-steps (100%, 50%)		3-steps (100%, 75%, 50%)		
Connections	-					
Suction flange		MYCOM 100A (4")		ANSI 300 # 5"		
Discharge flange	-	MYCOM 65A (2 1/2")		ANSI 300 # 3"		
Oil inlet port	-	Rc 1/2		Rc 1		
Economizer	-	Rc 3/8		RC 3/4		
Liquid injection	-	Rc 1/4		Rc 1/2		

* The weight includes the motor spacer flange (excl. the main drive motor)

Remarks:

For the limits of working temperature, pressure and speed, please refer to the "Instruction Manual"

WORLDWIDE

- 39 countries / 126 offices
- 8 production plants



Europe Organization

GERMANY

Süd
Untere Bahnhofstrasse 38a
82110 Germering
Tel. +49 89 5527 989 0

Außenstelle Nord
Tel. +49 151 425 290 55

Service-Werkstatt
Zum Buckesch 7a
48336 Sassenberg-Füchtort
Tel. +49 170 2960 409
Fax. +49 89 5527 989 10
<http://www.mayekawa.de>
Email info@mayekawa.de

SWITZERLAND

Rosenbergstrasse 31,
6300 Zug
Tel. +41 41 726 8626
Fax +41 41 726 8620
<http://www.mayekawa.ch>
E-mail info@mayekawa.ch

ITALY

Milan Office
Via Riccardo Lombardi 19/12
20153 Milano
Tel. +39 2 48929218
Fax +39 2 4531728

Bologna Office
Via Pradazzo 7
40012 Calerara di Reno
Tel. +39 51 726364
Fax. +39 51 726804

UNITED KINGDOM

16 Oakhurst Gardens
DA7 5JP Bexleyheath, Kent
Tel. +44 1322 433558
Fax+44 1322 433164

FRANCE

East Branch Office
9, Rue Michael Faraday
78180 Montigny-Le-Bretonneux
Tel. +33 1 30 58 26 00
Fax+33 1 30 58 19 37

West Branch Office
6, Square des Pruniers
22400 Lamballe
Tel. +33 2 96 76 59 13
Fax+33 1 30 58 19 37
E-mail mayekawa.france@mayekawa.eu

SPAIN

Calle Montevideo 5, Nave 13
Pol. Industrial Camporoso
28806 Alcala de Henares, Madrid
Tel. +34 91 830 0392
Fax+34 91 830 0397
<http://www.mayekawa.es>
E-mail mayekawa@mayekawa.es

BULGARIA

Kamen Andreev Str. 24,
1303 Sofia
Tel. +359 2 8910130
Fax+359 2 8910131

EGYPT

New Cairo
5th Settlement
North 90th St.
The 47th Building
Tel. +20 22 5062925
Fax. +20 22 5032901

POLAND

ul. Druskiennicka 8/10
60-476 Poznan
Tel. +48 61 8420738
Fax. +48 61 8485837

MOROCCO

6, Allée des Cyprès
20250 Casablanca
Tel. +212 600 041241

RUSSIA

Office 228, Korovy Val St. 7
119049 Moscow
Tel. +7 499 230 01 76
Fax+7 499 230 21 12
<http://www.mayekawa.ru>
E-mail info@mayekawa.ru

DUBAI

P.O.Box 61349, W-HOUSE
No.RA-08-UC05
Jebel Ali Free Zone Dubai, UAE
Tel. +971-4-888-6363
Fax +971-4-888-6373

REPUBLIC OF SOUTH AFRICA

West End
Unit 3 Prime Park
Printers Way
Montague Gardens 7441
Tel. +27 21 551 1434
Fax. +27 86 5463618

TURKEY

Dunya Ticaret Merkezi
A/2 Blok Kat:10 No:325 Yesilkoy, Istanbul
Tel. +90 212 465 36 31 34
Fax +90 212 465 36 35

ABU DHABI

All & Sons Business Center Office no.201
All Khalfan rached Al Mulawa Al Dhahin Bldg
Plot no 29, Al Ain Road, Umm Al nar
Tel. +971 2 5102151
Fax. +971 2 5102571

JAPAN HEAD OFFICE

3-14-15 Botan Koto-ku
Tokyo 135 8482, JAPAN
Tel. 81 3 3642 8181
Fax 81 3 3643 7094
E-mail e-public@mayekawa.co.jp

MAYEKAWA Europe nv/sa

Leuvensesteenweg 605
1930 Zaventem - Belgium
Tel.+32 2 757 90 75
Fax +32 2 757 90 23
<http://www.mayekawa.eu>
E-mail info@mayekawa.eu